

Prima


APBX 8 AS₂

Active Saled Sub Box
500 W



TECHNICAL SPECIFICATIONS		
Component		Active Sub Box
Subwoofer size	mm (in.)	200 (8)
Power Handling	W peak	500
	W continuous	250
Impedance	Ω	0,4
Sub box size	mm (in.)	368 (14.49) x 158 (6.22) x 294 (11.57)
Weight of one component	kg (lb.)	6,3 (13.89)
Magnet		High density flux ferrite
Cone		Water-repellent pressed paper
Subwoofer Voice coil Ø	mm (in.)	40 (1.57)

- 1 Integrated 250 W RMS @ 0.4 Ω D-Class amplifier featuring he-li technology (high efficiency / low impedance) without switching power supply, for a performance next to ideal.
- 2 Input stage DBT (Dynamic Bass Tracking) technology allows 100% use of the he-li (High Efficiency Low Impedance) amplifier power and to enjoy a tense and dynamic bass even at very high listening volumes.
- 3 Butterworth low-pass filter at 12dB/Oct. with variable cutting frequency (50-300 Hz), phase control (0 - 180 °) and adjustable bass-boost 0÷6 db @ 45Hz.
- 4 Defeatable filter to use the sub dedicated output of a bit or AP bit processor.
- 5 High level audio input on multi-pin connector for maximum OEM integration and low level on RCA for aftermarket sources.
- 6 ART turn on function (Automatic Remote Turn-On) selectable among: Remote-in, Hi-level, Audio signal.
- 7 Box with ultra-low profile (6.22 in. / 158 mm) in air suspension, designed to take full advantage of the performance of the 8-inch APS 8 DL high-impedance driver.
- 8 The SSP (Sub Smart Plug) terminal block is provided with a Plug & Play connector to be able to disconnect the box easily and safely.
- 9 The 2S² (2 Sides / 2 Sounds) design provides the ability to select between Down-Firing positioning to increase the low frequency extension and Up-Firing install to obtain more punch and definition.
- 10 Down-firing levelling feet with Velcro inserts included for a secure grip with the carpet, ensuring extreme ease of removal.
- 11 Rounded corners allow easy placement in the trunk and act as a reinforcement to reduce enclosure resonances.
- 12 Exclusive design of the cone, dust-cap and basket geometry to achieve a wide linear excursion (9 mm in one direction), keeping the depth required for assembly to a minimum.
- 13 HRC AP remote control included.
- 14 Sturdy metal grille included, for a total protection of the subwoofer driver.

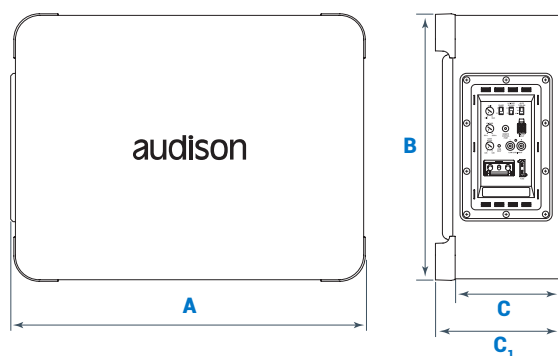



From R&D to
final product
KLIPPEL
since 2005

A	B	C	C ₁
368 mm	294 mm	135 mm	158 mm
14.49 in.	11.57 in.	5.31 in.	6.22 in.

dbt
Dynamic Bass
Tracking

he·li
High Efficiency -
Low Impedance

ssp
Sub Smart Plug

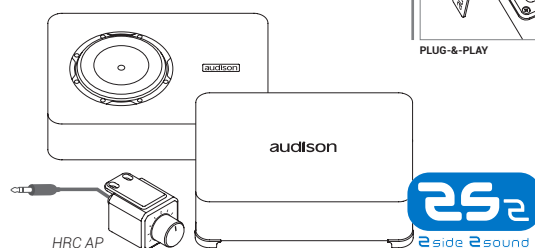

Technology Art Sound
Manufactured by
elettromedia

Elettromedia
62018 Potenza Picena (MC) Italy
T +39 0733 870 870 - F +39 0733 870 880
elettromedia.com

audison