




...connecting to the aftermarket

CTSAD00C.2

Audi Steering Wheel Control Interface

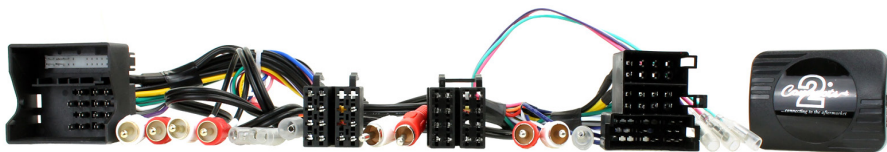

Vehicle Application

Audi A3 (8P) 2003 - 2012
Audi A4 (8E, B6, B7) 2001 - 2015
Audi A6 (4B, C5) 2004 - 2011
Audi TT (8J) 2003 - 2014

Key Features

- Retains Steering Wheel Controls
- Retains Factory Phone Buttons
- Retains BOSE Amplified System
- Provides Speed Pulse, Park Brake, Reverse Gear & Amp Remote Outputs
- Supplied with ISO & Quadlock Leads

www.connects2.com

Designed and
Engineered
in the UK.



The information provided in this document is subject to change without notice due to changes and/or improvements to the product/s.

CTSAD00C.2

WIRING COLOUR CODES

Purple	Right Rear Speaker +	Yellow	Permanent 12V
Purple/Black	Right Rear Speaker -	Black	Ground
Green	Left Rear Speaker +	Red	Ignition 12V
Green/Black	Left Rear Speaker -	Orange	Illumination
Grey	Right Front Speaker +	Green	Park Brake
Grey/Black	Right Front Speaker -	Pink	Speed Pulse
White	Left Front Speaker +	Purple/White	Reverse Gear
White/Black	Left Front Speaker -	Blue	Amp Remote

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are using during the installation to avoid damage to the vehicle or product. **Connects2 can not be held responsible for the installation of this product.**

NB: This product is supplied with two looms. Before installation, select the loom with the connector type required for the vehicle (ISO or Quadlock) and discard the other loom.

Connects2 Ltd. want to provide a fast and suitable resolution to any problems encountered during installation of this product. To get in touch with our dedicated technical support team, please fill in a ticket at support.connects2.com and provide as much information as possible.

FOLLOW US ON SOCIAL MEDIA
for all the latest updates



/CONNECTS2
Watch us on
YouTube



/CONNECTS2
Like us on
facebook



CONNECTS2LTD
Follow us on
instagram



@CONNECTS2
Follow us on
twitter




CONNECTS2LTD
Follow us on
linkedin



CONNECTS2BLOG.COM
Follow our blog on
wordpress

FITTING GUIDE

1. Remove and disconnect the original head unit.
2. Connect the 12 way molex connector of the head unit patch lead (supplied separately) to the interface.



3. Connect the opposite end of head unit patch lead to the head unit steering wheel control input on the back of the aftermarket head unit.

NB: This may be a 3.5mm jack plug or a wire input depending upon the head unit brand being fitted. Please see the head unit installation manual for further information on where to connect.


Important: This step must be completed before connecting power to the interface. Failure to so do may result in no steering wheel control function.



4. Connect the 14 way molex connector to the interface



5. Connect the male power/speaker ISO harness to the female power/speaker ISO harness from the aftermarket head unit. For aftermarket head units without an ISO connector, please refer to "Wiring Colour Codes" on Pg. 2.

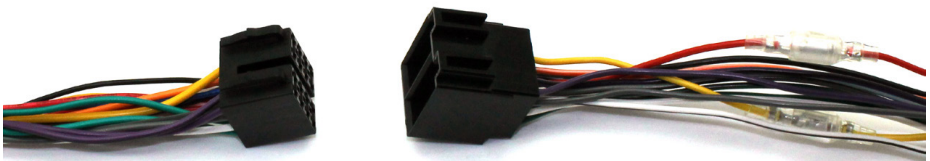

FITTING GUIDE

- 6. Make the red and white RCA connections from the loom to the back of the aftermarket head unit
- 7. Connect the female vehicle specific connector on the harness to the male vehicle connector from the vehicle. Test head unit for correct operation.

STEERING WHEEL CONTROL FUNCTIONALITY

Original Button	Function
Up Arrow	Track +
Down Arrow	Track -
Volume +	Volume +
Volume -	Volume -
Mute	Mute
Speech	Pick Up (Short Press)
Speech	Hang Up (Long Press)

Example Steering Wheel Control Configuration
(Actual configuration may differ depending on vehicle model)

